



HF MARINE TRANSCEIVER

IC-M802

General version



Long Distance Communication Made Clear and Simple

4x8-inch remote controller and 4x4-inch external speaker

The compact remote controller and external speaker allows you flexible and efficient installation in a dashboard or a panel, while placing the main unit in an out-of-the-way location.

Large LCD with dot-matrix characters

The IC-M802 has the capability of up to 24 characters x 9 lines full dot-matrix display. Operating status and setting of information can be seen instantly and clearly.

Easy to use

Two large Group and Channel dials offer easy channel selection. Buttons and dials are clearly labelled for an ergonomic layout that makes the IC-M802 one of the easiest radios in the market to use.

Digital signal processing

The latest DSP technology improves both the transmit and receiver performance. The speech compressor, utilizing DSP, increases average talk power. The digital IF filter provides flexible filter settings for narrow band signals like SITOR, FSK, and HF e-mail without having to install an optional filter.

150W (PEP) of powerful output

A stable 150W of output power provides reliable long distance communication. The large cooling fan ensures stable internal temperature even during full-power operation.

Built-in 2-tone Alarm function

A 2-tone alarm (2182kHz) signal can be transmitted simply by the push of the 'Alarm' button. A spring loaded cover prevents accidental activation.

Automatic antenna tuner, AT-140

An optional automatic tuner, AT-140, easily connects to the IC-M802. When the tuner cannot tune the antenna, the IC-M802 bypasses the tuner and displays a warning on the LCD display.

Other features

- Wide band coverage receiver—0.5 to 29.9999MHz
- RS-232C connector for PC connection
- J3E, J2B, F1B and A1A operating modes are available
- Headphone jack located on the front of the remote controller
- CW full break-in and semi break-in

Icom Inc.

SPECIFICATIONS

GENERAL

- Frequency coverage (Unit : MHz):
 - Rx 0.5–29.9999 (continuous)
 - Tx 1.6– 2.9999, 4.0– 4.9999, 6.0– 6.9999
 - 8.0– 8.9999, 12.0–13.9999, 16.0–17.9999
 - 18.0–19.9999, 22.0–22.9999, 25.0–27.5000
- Type of emission : J3E (SSB), J2B (AFSK), F1B (FSK), A1A (CW), H3E (AM)*
 - * Receive only
- Number of channels : 1195 (max.)
 - (160 user programmable; 249 ITU SSB duplex; 72 ITU SSB simplex; 662 ITU FSK duplex; 21 ITU 4MHz simplex; 31 ITU 8MHz simplex)
- Antenna impedance : 50Ω (SO-239)
- Power supply requirement : 13.6V DC ±15%
- Max. current drain (at 13.6V DC):
 - Tx (Max. power) 30A (typ.)
 - Rx (Max. audio) 3.0A
- Operating temp. range : -30°C to +60°C; -22°F to +140°F
 - Guaranteed range : -20°C to +55°C; -4°F to +131°F
- Frequency stability : ±20Hz (at -20°C to +55°C)

- Dimensions (W×H×D; projections not included):
 - Main unit 240×94×238.4mm; 9⁵/₁₆×3¹/₁₆×9⁹/₁₆ in
 - Controller 220×110×84.4mm; 8⁷/₁₆×4¹/₁₆×3³/₁₆ in
 - Speaker 110×110×84.4mm; 4¹/₁₆×4¹/₁₆×3³/₁₆ in
- Weight :
 - Main unit 4.7kg; 10.36lb
 - Controller 570g; 1.26lb
 - Speaker 370g; 0.81lb

TRANSMITTER

- Output power : 150, 60, 20W PEP (Selectable)
- Spurious emissions : -62dB
- Unwanted sideband : 55dB
- Carrier suppression : 40dB
- Microphone impedance : 2.4kΩ

Supplied accessories:

- Separation cable, OPC-1106 (5m; 16.4ft)
- Hand microphone, HM-135
- External speaker, SP-24
- Mounting bracket kits
- Microphone hanger
- DC power cables
- ACC plugs
- Spare fuses

RECEIVER

- Sensitivity (at 10dB S/N) :

	J3E, A1A	J2B, F1B	H3E
0.5– 1.5999MHz	6.3μV	—	32μV
1.6– 1.7999MHz	0.89μV	0.89μV	6.3μV
1.8– 3.9999MHz	0.5μV	0.5μV	3.2μV
4.0–29.9999MHz	—	—	—
- Spurious response rejection ratio: (1.6–29.9999MHz) More than 70dB
- Audio output power : 4.0W typical at 10% distortion (at 13.6V DC) with a 4Ω load
- Clarity variable range : ±150Hz
- Speaker connector : 2-conductor 3.5 (d) mm (1/8") 4Q
- Headphone connector : 3-conductor 3.5 (d) mm (1/8") /8–16Q

All stated specifications are subject to change without notice or obligation.


OPTIONS



Matches the transceiver to a dipole antenna. Covers all HF bands from 1.5 to 30MHz. Two 8m (26.2ft) antenna wires supplied.



Matches the transceiver to a longwire antenna. Covers all HF bands from 1.5 to 30MHz. A 15m (49.2ft) antenna wire supplied.



Covers 1.9 to 30MHz band. Has an SO-239 connector and 30m (98.4ft) coaxial cable. Easy to assemble (non-kink construction).



Matches the transceiver to a long wire antenna with little insertion loss. Antenna and control cable receptacles are easy to install. AT-130 is also available.



10m (32.8ft) shielded control cable connects between AT-140 and transceiver. Protects the transceiver from RF feedback.



Provides 13.6V DC (30A) output from an AC outlet.




For mounting the controller, RC-25 or the SP-24 to a panel.



Remote function microphone equipped with channel and programmable buttons. Same as supplied.

- OPC-1106 SEPARATION CABLE 5m (16.4ft) separation cable between controller and main unit. Same as supplied.
- RC-25 REMOTE CONTROLLER Remote controller head. Same as supplied.
- SP-24 EXTERNAL SPEAKER 4x4-inch external speaker. Same as supplied. Input impedance: 4Ω. Max. input power: 7W.

SYSTEM OVERVIEW

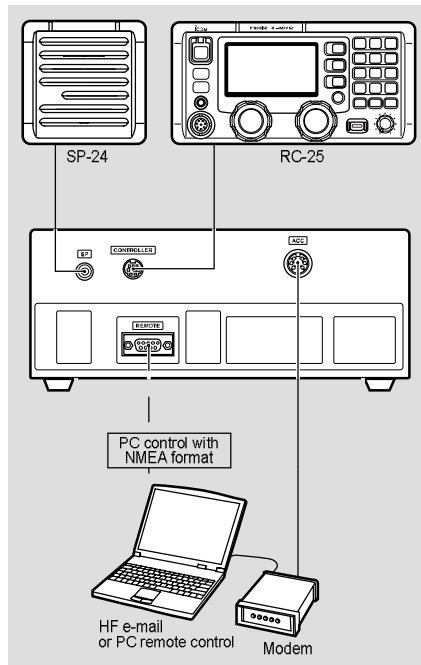

Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: 06 6793 5302 Fax: 06 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

<Corporate Headquarters>
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.
Phone: (425) 454-8155 Fax: (425) 454-1509
URL : <http://www.icomamerica.com>
<Customer Service> Phone : (425) 454-7619

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C. V4K 5B8, Canada
Phone: (604) 952-4266 Fax: (604) 952-0090
URL : <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.

A.B.N. 88 006 092 575
290-294 Albert Street, Brunswick, Victoria, 3056, Australia
Phone: 03 9387 0666 Fax: 03 9387 0022
URL : <http://www.icom.net.au>

Icom New Zealand

146A Harris Road, East Tamaki, Auckland, New Zealand
Phone: 09 274 4062 Fax: 09 274 4708
URL : <http://www.icom.co.nz>

Icom (Europe) GmbH

Communication Equipment
Himmelgeister Str. 100, D-40225 Düsseldorf, Germany
Phone: 0211 346047 Fax: 0211 333639
URL : <http://www.icomeurope.com>

Icom Spain S.L.

Ctra. de Gracia a Manresa Km. 14.750
08190 Sant Cugat del Valles Barcelona, SPAIN
Phone: (93) 590 26 70 Fax: (93) 589 04 46
URL : <http://www.icomspain.com>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.
Phone: 01227 741741 Fax: 01227 741742
URL : <http://www.icomuk.co.uk>

Icom France S.a

Zac de la Plaine, Rue Brindjonn des Moulains
BP 5804, 31505 Toulouse Cedex, France
Phone: 561 36 03 03 Fax: 561 36 03 00
URL : <http://www.icom-france.com>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: (02) 2559 1899 Fax: (02) 2559 1874
URL : <http://www.asia-icom.com>

Beijing Icom Ltd.

1305, Wanshang Plaza, Shijingshan Road,
Beijing, China
Phone: (010) 6866 6337 Fax: (010) 6866 3553



Certificate Number Q14190

Icom Inc. (Japan), is an ISO9001 certification acquired company.

Your local distributor/dealer:

WWW.VIVA-TELECOM.RU